
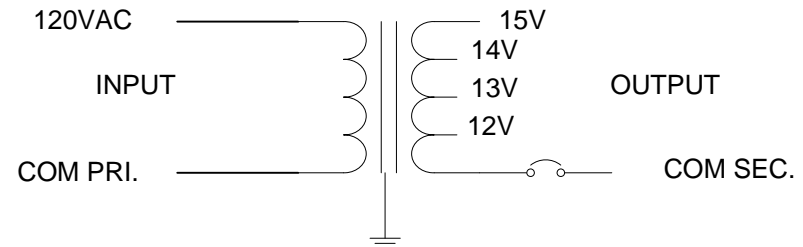
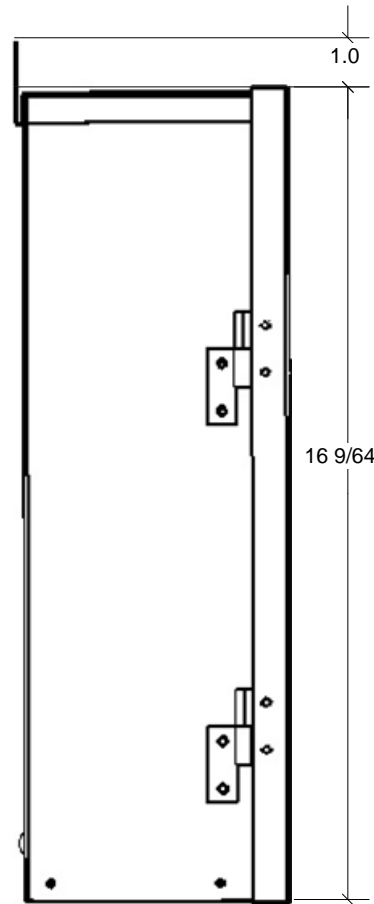
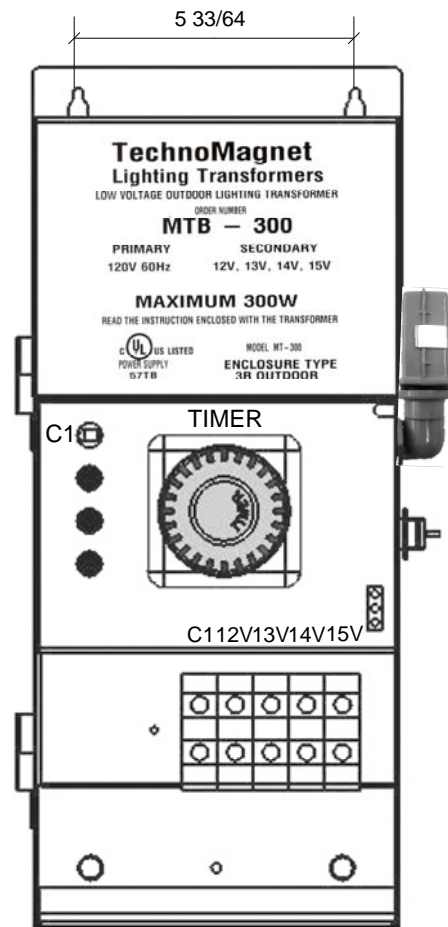


Table 1.

Terminal block label	Output Volts
12V	12.2
13V	13.2
14V	14.3
15V	15

NOTES:

1. Output voltage in table 1 with 120VAC applied and fully loaded.
2. Maximum no load input current : 0.6A
3. Case Temperature not exceed 70°C in a 40°C ambient, fully loaded.
4. The actual transformer 375VA is encapsulated in the case.
5. The transformer is dimmable with all dimmers designed for magnetic transformers.
6. Input is 18 AWG line cord, output is terminal block 12~2 AWG (4~35 sq. mm.)
7. The output terminal block rated for 125A and 800V.
8. The photocell connector rated for 13A 250V.
9. The transformer use class B (130°C) insulation material.
10. The transformer has manual reset magnetic 25A circuit breaker on the secondary side.
11. Wiring compartment has 4 knockouts 0.87", 4 knockouts 1.1" and one two stage 1.1" and 1.5" knockout.
12. The case is black powder coated or stainless steel.
13. The Transformer is UL listed.
14. The label containing Technomagnet catalog number and electrical rating.
15. The transformer ready to use with timer and photocell.

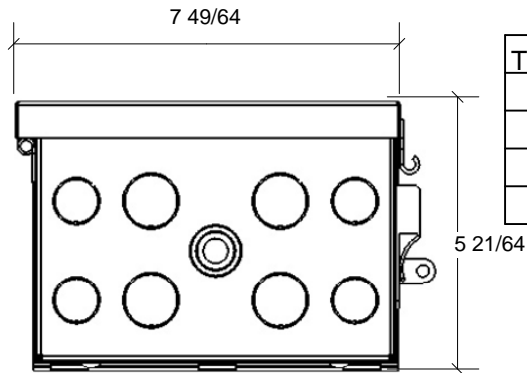

TechnoMagnet LTD. Interactive Lighting Servers				15547 Cabrito Road Van Nuys, CA 91406	
	NAME	DATE	SING.	PAGE ____	SCALE no scale
DRW.				OF ____	TOLERANCE ±
CHK.				DESCRIPTION: Multi-tap 300VA 12V system Outdoor Transformer.	
APV.					
PART No.	MTB- 300	REV.	B		