


4" AIR TIGHT IC LINE VOLTAGE RECESSED HOUSING - NEW CONSTRUCTION

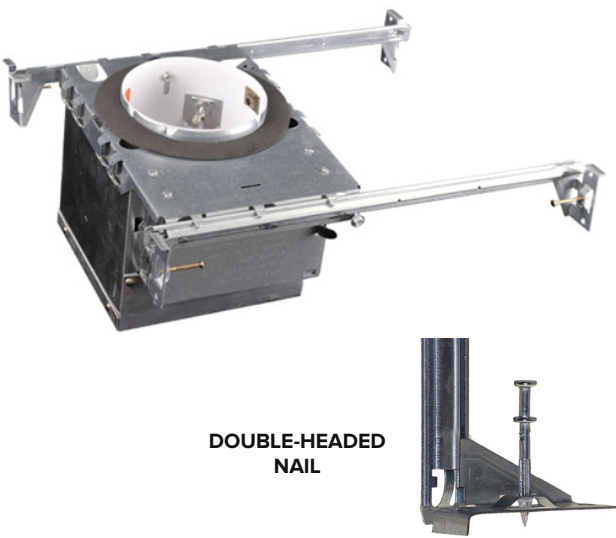

DOUBLE-HEADED
NAIL

Housing

- Heavy gauge double headed nail for easy removal and strength
- Aluminum housing for maximum heat dissipation
- Housing can be adjusted for ceiling thickness up to 1"

Junction Box

- Listed for through branch circuit wiring
- Contains (4) ½" knockouts

Hanger Bars / New Construction

- Pre-installed. Double Headed Nail easily installs and allows for re-positioning
- Hanger bars are adjustable from 12" to 24"

Socket

- Medium base screw shell porcelain socket preinstalled on adjustable mounting bracket

Thermal Protection

- Standard thermal protection device guards against improper installation, overlampping and misuse of insulation material

Listings

- cUL Listed
- UL Listed



PART NUMBER: US-104-ICAT

SPECIFICATIONS | US-104-ICAT

MATERIAL	ALUMINUM
BAR HANGERS	12"-24" JOIST SPAN
ADJUSTABLE	VERTICAL
KNOCKOUTS	(4) ½"
RECESSED SIZE	4 INCH
LENGTH	8"
WIDTH	5 ¼"
HEIGHT	6"
INSULATION COMPLIANT (IC)	YES

APPROVAL TYPE

C-UL/UL - DAMP LOCATION / FEED-THROUGH WIRING

BULB COMPATIBILITY/TYPE

E26 / MED. BASED LAMPS

HEAVY GAUGE DOUBLE HEAD NAILS

FOR STRENGTH AND EASY REMOVAL

DIMENSIONS:

