



Tube


- > Retrofit for T8 & T12 fluorescent tube
- > Excellent color consistency
- > No flickering/ Noise-free design
- > UL/cUL Listed
- > Universal Voltage 120-277V
- > Rated 40,000 hours average life




Applications

Conference/ Meeting Room, Factory, Office, School/ University, Hospital, Hotel


Wiring Methods

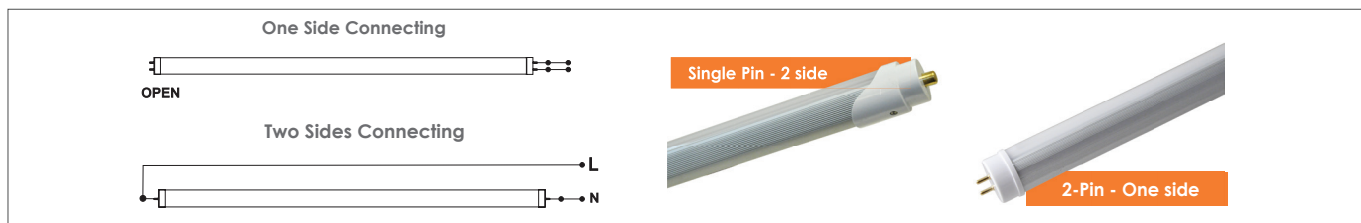



Item	Description	Color Temp	Wattage	Output Lumen	Bulb	Base	Lens	Equiv. Wattage	CRI	
5778	LED10T8/24FR10/840	4000K	10W	1,000	24"	2-pin	Frosted	17W	>80	●
5774	LED10T8/24FR10/850	5000K	10W	1,050	24"	2-pin	Frosted	17W	>80	●
5779	LED10T8/36FR10/840	4000K	10W	1,000	36"	2-pin	Frosted	25W	>80	●
5780	LED10T8/36FR10/850	5000K	10W	1,050	36"	2-pin	Frosted	25W	>80	●
5817	LED14T8/FR17/840	4000K	14W	1,700	48"	2-pin	Frosted	32W	>80	●
5818	LED14T8/FR17/850	5000K	14W	1,750	48"	2-pin	Frosted	32W	>80	●
5819	LED16T8/FR17/840	4000K	16W	1,750	48"	2-pin	Frosted	32W	>80	●
5820	LED16T8/FR18/850	5000K	16W	1,850	48"	2-pin	Frosted	32W	>80	●
5775	LED18T8/FR19/840	4000K	18W	1,900	48"	2-pin	Frosted	32W	>80	●
5776	LED18T8/CL19/840	5000K	18W	1,900	48"	2-pin	Clear	32W	>80	●
5773	LED18T8/FR19/850	5000K	18W	1,900	48"	2-pin	Frosted	32W	>80	●
5777	LED18T8/CL19/850	5000K	18W	1,900	48"	2-pin	Clear	32W	>80	●
5811	LED40T8/96FR43/840	4000K	40W	4,300	96"	1-pin	Frosted	75W	>80	●
5812	LED40T8/96FR43/850	5000K	40W	4,300	96"	1-pin	Frosted	75W	>80	●

Dimension



Description	Diameter (in/mm)	Length(in/mm)	Weight (lbs)	Package (Inner/Master)
2 ft	1 / 25.4	24 / 610	0.50	1/20
3 ft	1 / 25.4	36 / 915	0.50	1/20
4 ft	1 / 25.4	48 / 1219	0.80	1/20
8 ft	1 / 25.4	96 / 2438	1.50	1/20