



## RDR Downlight Retrofit

### FEATURES

- Replaces legacy 4" or 6" CFL or incandescent downlights
- Provides comfortable diffused light with no dark spots
- FieldCCeT feature allows for multiple "set and forget" CCT options in each fixture

### CERTIFICATIONS

- UL Listed
- Listed for wet locations
- ENERGY STAR® Approved for superior energy efficiency
- Title 20 certified and supports compliance with Title 24 (JA8)

### PERFORMANCE

- Rated lifetime L70: 50,000
- FieldCCeT 27/30/35/40/5000K selectable CCT
- CRI: >90

### ELECTRICAL

- Input voltage: 120V
- Triac dimming
- Power Factor: >0.9
- THD: <20%

### THERMAL

- -4°F to 104°F (-20°C to 40°C) operating temperature

### CONSTRUCTION

- White finish
- Frosted lens for diffuse lighting

### WARRANTY

- 5 year limited warranty. Additional warranty options available. Contact EiKO for details

project name	type
catalog number	voltage
approved by	date



RDR 4"

RDR 6"

### APPLICATIONS

- Hotel Lobby
- Shopping Center
- Supermarket
- Recreation Center
- Public Areas
- Corridors
- Offices
- Schools
- Hospitality
- Retail

## CONFIGURATOR


MODEL	SIZE	LUMEN PACKAGE	CRI/CCT	VOLTAGE	DIMMING	FINISH	BAFFLES
RDR : Downlight Retrofit	4 - 4"	10W - 10W; 800 lm	9CCT5 - 2700/3000/3500/4000/5000K	120 - 120V	DT - Triac dimming	WH - White	B - Baffles
	6 - 6"	13W - 13W; 1,040 lm					




## PERFORMANCE SUMMARY

ORDER CODE	ITEM #	SIZE	WATTS	LUMENS	CCT	CRI	VOLTS	ENERGY STAR
11571	RDR4/10W9CCT5/120DTWHB	4"	10W	800	2700/3000/3500/4000/5000K	>90	120V	★
11572	RDR6/13W9CCT5/120DTWHB	6"	13W	1,040	2700/3000/3500/4000/5000K	>90	120V	★


## PRODUCT DIMENSIONS




136mm

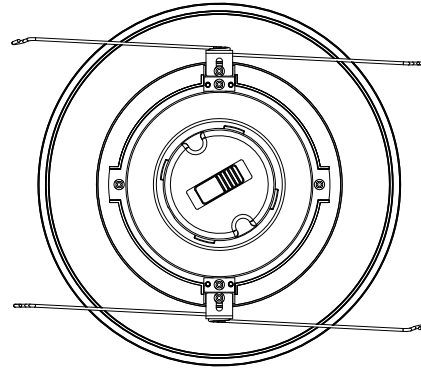

190mm



73mm

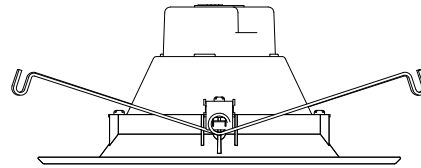

83.3mm

RDR4

RDR6