

NOTES:

1. Output voltage in table 1 with 120VAC applied and fully loaded.
2. Maximum no load input current : 0.05A
3. Enclosure Temperature does not exceed 55°C in a 40°C ambient, fully loaded.
4. The actual transformer 20VA is encapsulated in the enclosure.
5. The transformer is dimmable with all dimmers that provide symmetrical form of the current under any condition.
6. Input and output terminals are terminal block.
7. The transformer uses a class B (130°C) UL recognized insulation system E164279 MD.N66.130.00.
8. The transformer has a thermal self-reset 1.25A circuit breaker on the secondary side and 0.8A on the secondary side.
9. Wiring compartment has 2 side knockouts sized for 3/4 inch screw cable connectors.
10. The removable wiring compartment is secured in place by clips and one screw.
11. The enclosure is black powder coated.
12. The transformer is cETLus listed, control # 4005509 confirms to UL STD 1310, certified to CSA STD C22.2 #223.
13. The label contains Technomagnet's catalog number and electrical rating.

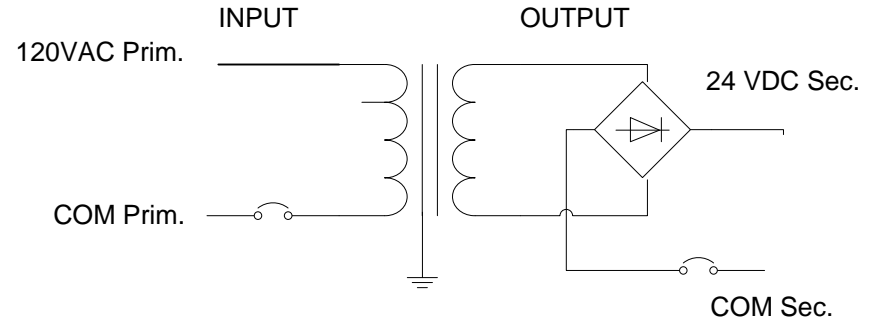



Table 1.

Output Volts	
120AC	
23.5DC	

 TechnoMagnet LTD. Interactive Lighting Servers		15547 Cabrito Road Unit A Van Nuys, CA 91406	
		Page 1 Of 1	Scale: no scale Tolerance: ±
DRW.			Title: Compact indoor/outdoor 24VDC 20VA Low voltage Transformer.
CHK.			
APR.			
Part #	MF20S24DC	Rev. A	