

**NOTES:**

1. Output voltage in table 1 with 120VAC applied and fully loaded.
2. Maximum no load input current : 0.14A
3. Enclosure Temperature does not exceed 55°C in a 40°C ambient, fully loaded.
4. The actual transformer 35VA is encapsulated in the enclosure.
5. The transformer is dimmable with all dimmers that provide symmetrical form of the current under any condition.
6. Input and output terminals are terminal block.
7. The transformer uses a class B (130°C) UL recognized insulation system E164279 MD.N66.130.00.
8. The transformer has a thermal self-reset 3A circuit breaker on the secondary side and 0.8A on the secondary side.
9. Wiring compartment has 2 side knockouts sized for 3/4 inch screw cable connectors.
10. The removable wiring compartment is secured in place by clips and one screw.
11. The enclosure is black powder coated.
12. The transformer is cETLus listed, control # 4005509 confirms to UL STD 1310, certified to CSA STD C22.2 #223.
13. The label contains Technomagnet's catalog number and electrical rating.

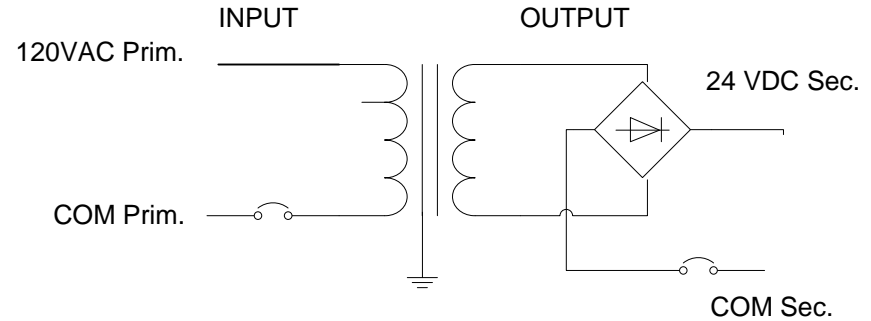


Table 1.

Output Volts	
120AC	
23.5DC	

		15547 Cabrito Road Unit A Van Nuys, CA 91406			
				Interactive Lighting Servers	
DRW.				Page 1	Scale: no scale
CHK.				Of 1	Tolerance: ±
APR.				Title:	
Part # MF35S24DC		Rev. A		Compact indoor/outdoor 24VDC 35VA Low voltage Transformer.	