

NOTES:

1. Output voltage in table 1 with 120VAC applied and fully loaded.
2. Maximum no load input current : 0.5A
3. Enclosure Temperature does not exceed 65°C in a 40°C ambient, fully loaded.
4. The actual transformer 150VA is encapsulated in the enclosure.
5. The transformer is dimmable with all dimmers that provide symmetrical form of the current under any condition.
6. Input line cord - 3 X 18 AWG, output terminal block - 150V 55A 105°C.
7. The transformer uses a class B (130°C) insulation system.
8. The transformer has a manual reset thermal 20A circuit breaker on the secondary side.
9. Wiring compartment has 3 knockouts sized for 3/4 inch screw cable connectors.
10. The wiring compartment cover hinged with rivets and opens vertically from bottom to top.
11. The enclosure is made of stainless steel and NEMA 3R rated..
12. The Transformer is UL listed. UL file number: E194005 model C-150.
13. The label contains Technomagnet's catalog number and electrical rating.

Output Terminal Block

120VAC Pri.
Boost Pri.

COM Pri.

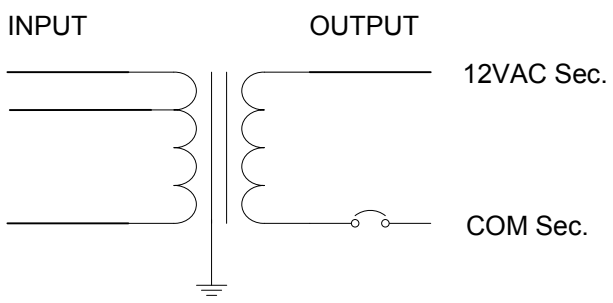


Table 1.

Output Volts	
120AC	Boost
11.8	12.8

				15547 Cabrito Road Unit A Van Nuys, CA 91406																			
				Interactive Lighting Servers																			
<table border="1"> <tr> <td>DRW.</td> <td></td> <td></td> <td></td> <td>PAGE ____</td> <td>SCALE no scale</td> </tr> <tr> <td>CHK.</td> <td></td> <td></td> <td></td> <td>OF ____</td> <td>TOLERANCE ±</td> </tr> <tr> <td>APV.</td> <td></td> <td></td> <td></td> <td colspan="2">DESCRIPTION: Compact outdoor 12V 150VA Low voltage Transformer.</td> </tr> </table>	DRW.				PAGE ____	SCALE no scale	CHK.				OF ____	TOLERANCE ±	APV.				DESCRIPTION: Compact outdoor 12V 150VA Low voltage Transformer.		PART No. SSC 150S-TP			REV. A	
	DRW.				PAGE ____	SCALE no scale																	
	CHK.				OF ____	TOLERANCE ±																	
APV.				DESCRIPTION: Compact outdoor 12V 150VA Low voltage Transformer.																			