

NOTES:

1. Output voltage in table 1 with 120VAC applied and fully loaded.
2. Maximum no load input current : 0.07A
3. Enclosure Temperature does not exceed 55°C in a 40°C ambient, fully loaded.
4. The actual transformer 20VA is encapsulated in the enclosure.
5. The transformer is dimmable with all dimmers that provide symmetrical form of the current under any condition.
6. Input and output leads are 18 AWG. or terminal block. Lead insulation is 105°C.
7. The transformer uses a class B (130°C) insulation system.
8. The transformer has a thermal self-reset 0.8A circuit breaker on the primary side and 1.75A on the secondary side
9. Wiring compartment has 2 side knockouts sized for 3/4 inch screw cable connectors.
10. The removable wiring compartment is secured in place by clips and one screw.
11. The enclosure is black powder coated.
13. The label contains Technomagnet's catalog number and electrical rating.

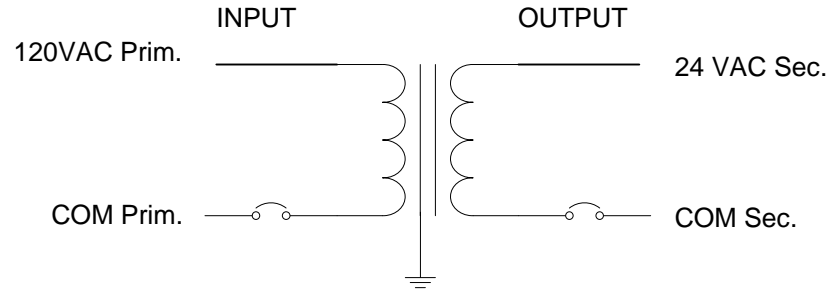


Table 1.

Output Volts	
120VAC	
24	

		Interactive Lighting Servers		15547 Cabrito Road Unit A Van Nuys, CA 91406	
				Page 1 Of 1	Scale: no scale Tolerance: ±
DRW.				Title: Compact indoor 24V 20VA Low voltage Transformer.	
CHK.					
APR.					
Part # TMC20S24V		Rev. A			