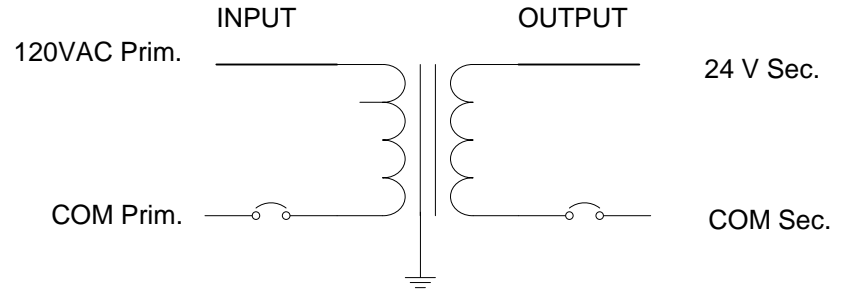


**NOTES:**

1. Output voltage in table 1 with 120VAC applied and fully loaded.
2. Maximum no load input current : 0.14A
3. Enclosure Temperature does not exceed 55°C in a 40°C ambient, fully loaded.
4. The actual transformer 35VA is encapsulated in the enclosure.
5. The transformer is dimmable with all dimmers that provide symmetrical form of the current under any condition.
6. Input and output terminals are terminal block.
7. The transformer uses a class B (130°C) UL recognized insulation system E164279 MD.N66.130.00.
8. The transformer has a thermal self-reset 3A protector on the secondary side and 0.8A on primary side.
9. Wiring compartment has 2 side knockouts sized for 3/4 inch screw cable connectors.
10. The removable wiring compartment is secured in place by clips and one screw.
11. The enclosure is black powder coated.
13. The label contains Technomagnet's catalog number and electrical rating.



**Table 1.**

Output Volts	
120VAC	
12VAC	

		Interactive Lighting Servers		15547 Cabrito Road Unit A Van Nuys, CA 91406	
				Page 1 Of 1	Scale: no scale Tolerance: ±
DRW.	Name	Date	Title:	Compact indoor 24V35VA Low voltage Transformer.	
CHK.	APR.	Rev. A	Part #		
TMC35S24V	Rev. A	Rev. A	Rev. A		