

NOTES:

1. Output voltage in table 1 with 120VAC applied and fully loaded.
2. Maximum no load input current : 0.6A
3. Enclosure Temperature does not exceed 70°C in a 40°C ambient, fully loaded.
4. The actual transformer 600VA is encapsulated in the enclosure.
5. The transformer is dimmable with all dimmers that provide symmetrical form of the current under any condition.
6. Input leads are 18 AWG 600V 105°C, output leads are 12 AWG 600V 150°C.
7. The transformer uses a class B (130°C) insulation system.
8. The transformer has manual reset 8 Amps. thermal breaker on primary side.
9. Wiring compartment has 8 side and 2 back knockouts sized for 3/4 inch screw cable connectors.
10. The removable cover for the wiring compartment is secured in place by clips.
11. The enclosure is black powder coated.
12. The Transformer is UL listed. UL file number: E304327. model CX-600
13. The label contains Technomagnet's catalog number and electrical rating.

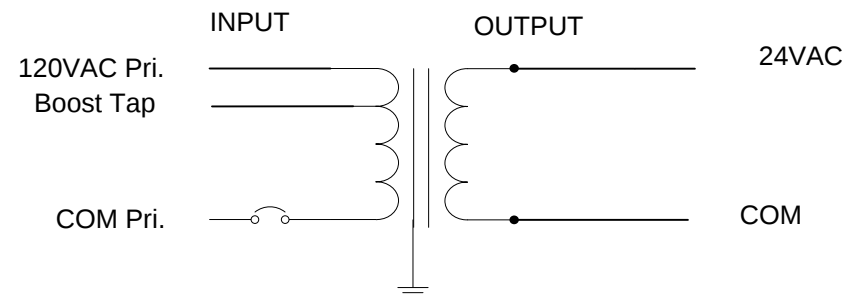
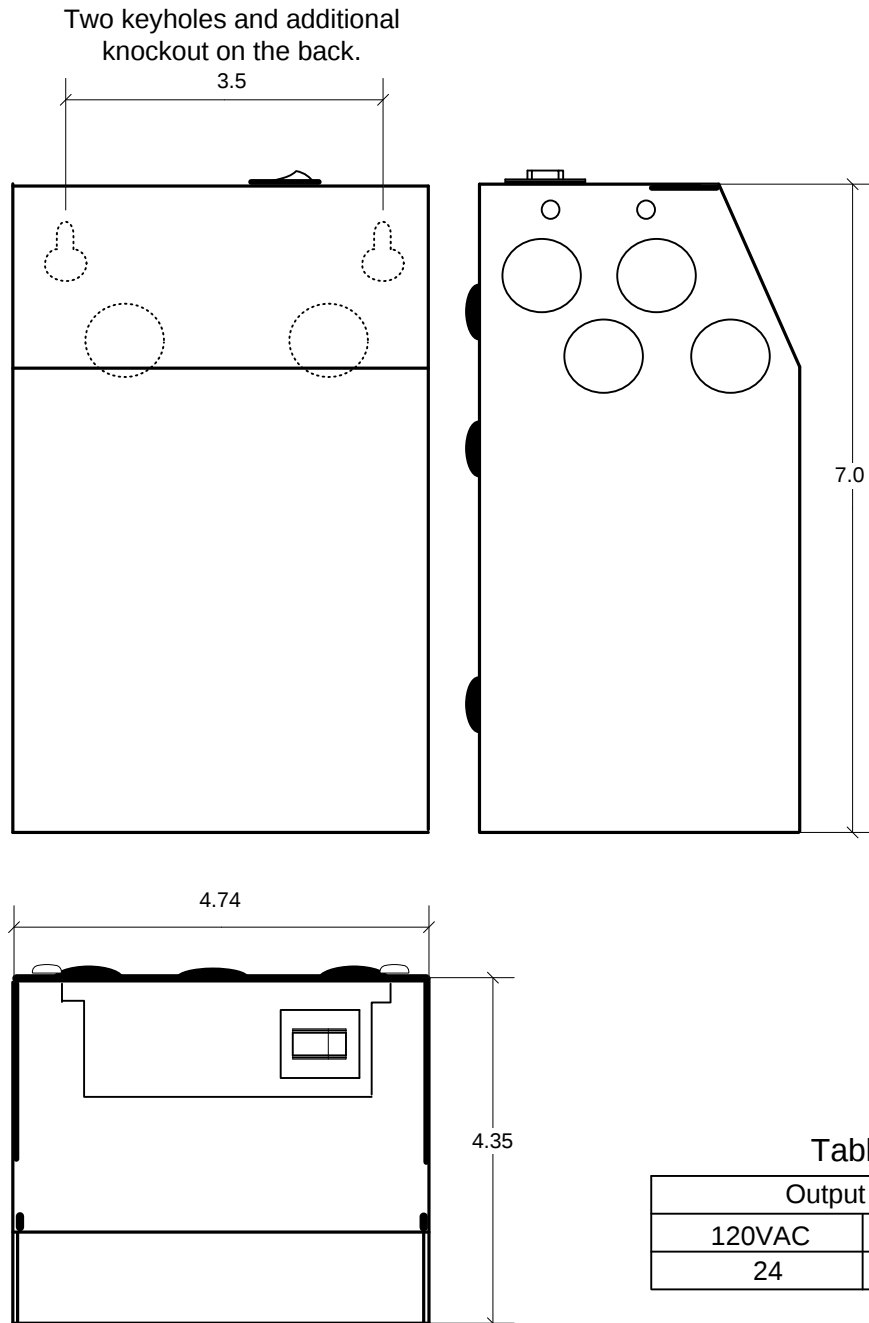


Table 1.

Output Volts	
120VAC	Boost
24	26

				15547 Cabrito Road Van Nuys, CA 91406	
Interactive Lighting Servers				PAGE ____ OF ____	
NAME DATE SING.				SCALE no scale TOLERANCE $\pm$	
DRW.				DESCRIPTION: Compact indoor 24V 600VA Low voltage Transformer.	
CHK.					
APV.					
PART No. TMC600P24 REV. A					