

## NOTES:

1. Output voltage in table 1 with 120VAC applied and fully loaded.
2. Maximum no load input current : 0.07A
3. Enclosure Temperature does not exceed 70°C in a 40°C ambient, fully loaded.
4. The actual transformer 50VA is encapsulated in the enclosure.
5. The transformer is dimmable with all dimmers that provide symmetrical form of the current under any condition.
6. Input and output terminals are terminal block.
7. The transformer uses a class B (130°C) UL recognized insulation system E164279 MD.N66.130.00. Compliant Class 2
8. The transformer has a thermal self-reset 5A protector on the secondary side and 0.8A on primary side.
9. Wiring compartment has 2 side knockouts sized for 1/2 inch screw cable connectors.
10. The removable wiring compartment is secured in place by clips and one screw.
11. The enclosure is black powder coated.
12. The transformer is cETLus listed, control # 4005509 confirms to UL STD 1310, certified to CSA STD C22.2 #223.
13. The label contains Technomagnet's catalog number and electrical rating.

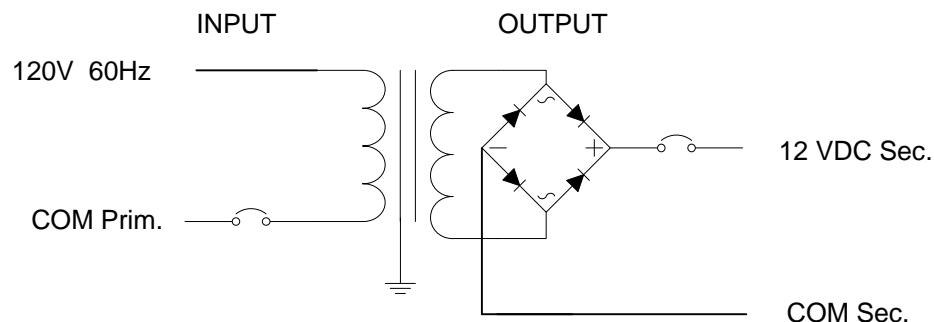


Table 1.

Output Volts	
120VAC	
12VDC	

**TechnoMagnet LTD.**  
Interactive Lighting Servers

15547 Cabrito Road Unit A  
Van Nuys, CA 91406

Name	Date	Page 1	Scale: no scale
DRW.		Of 1	Tolerance: ±
CHK.		Title: Compact indoor/outdoor 12VDC 50VA Low voltage Transformer.	
APR.			
Part # MF50S12VDC	Rev. A		